

Innovative safe for  
combined burglary and  
fire protection



# DuoGuard

## BURGLARY-RESISTANT PROTECTION

### Key Features

- Burglary protection in accordance with the European standard, EN1143-1, as certified by ECB•S for Grade I.
- DuoGuard has also been approved by ECB•S in accordance with EN1047-1 in class S 60P for one hour's fire protection of paper documents.
- The safe's new composite, torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight. The low weight minimises transportation and installation costs.
- The three-way boltwork is constructed with solid steel bolts.
- For additional security, DuoGuard is fitted with an active relocker and anti-drilling plates have been incorporated into the boltwork to withstand burglary attempts. The plates are specially designed and made with T200X carbide-clad steel for Grade I.
- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN1300, are both available as primary lock options. Electronic locks increase the level of security and prevent unauthorised access to the safe.
- Every model can be customised with a range of internal fittings to maximise storage capacity.
- A data media insert is available, certified 60 Diskette by NT Fire 017, for one hour's fire protection of heat-sensitive data media.
- DuoGuard has a modern design with an ergonomic soft-touch handle.



Cash Ratings should be used as a guide only – Please confirm your actual requirements with your insurer.

**Chubbsafes**  
*Trusted the world over.*

BURGLARY  
PROTECTION

## Product Specifications

Model	External (mm)			Internal (mm)			Weight (kg)	Volume (litres)
	Height	Width	Depth	Height	Width	Depth		
40	435	500	456	335	400	295	90	40
60	530	500	521	430	400	360	115	62
110	690	600	561	590	500	386	161	114
150	875	600	561	775	500	386	196	150
200	1150	600	561	1050	500	386	243	203
300	1600	600	561	1500	500	386	322	290
350	1600	675	585	1500	575	410	352	354
450	1850	675	615	1750	575	440	415	443

Chubb safes' policy is one of constant improvement. We reserve the right to alter any part of the specifications without any obligation.

### Lock Options



Electronic Lock

As the primary locking option, DuoGuard safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).

Dual locking is available from model 110 and up. The primary lock can be complemented by a combination lock or both a key lock and electronic lock can be fitted.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard.

DuoGuard's high-security electronic lock – certified Class B by ECB•S – includes the following features:

- 1 master code, 1 supervisor code and 7 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened. Also equipped with time-delay override.
- Protective function to raise silent alarm if lock is being opened under duress.

### Testing

#### Fire Testing

DuoGuard has been approved in accordance with the European standard, EN 1047-1 in fire class S 60P, which means the safe will protect paper documents for one hour. This certification was awarded by ECB•S (European Certification Board•Security Systems).

#### Test Procedure

##### Stage 1

The cabinet is placed in a furnace and heated to a temperature of almost 1000°C for 60 minutes to simulate the effects of a severe fire.


##### Stage 2

The cabinet is removed from the furnace and cooled. When opened, the inner temperature of the cabinet must not exceed 150°C.

#### Burglary Testing

DuoGuard has been approved by ECB•S in accordance with the European standard, EN 1143-1, for burglary protection Grade I.

A range of attack tools were used to test DuoGuard's level of resistance, from basic tools to sophisticated machinery such as oxyacetylene torches and thermal lances.

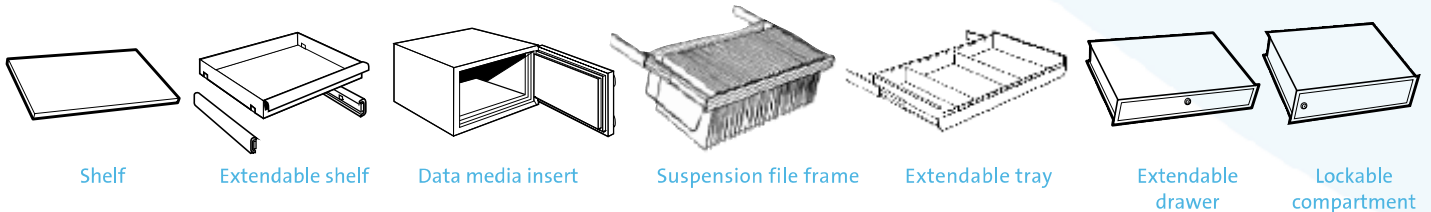

www.safesupplies.com.au

PROUDLY AUSTRALIAN OWNED AND OPERATED.

#### Victoria

40 Stubb Street Kensington, Vic 3031  
 Telephone: (03) 9372 5599 Fax: (03) 93725666  
 Website: <http://www.safesupplies.com.au>  
 Email: [bhenery@safesupplies.com.au](mailto:bhenery@safesupplies.com.au)

#### South Australia

275 Grange Road, Findon SA 5023  
 Telephone: (08) 8347 3399 Fax: (08) 8347 34009  
 Website: <http://www.safesupplies.com.au>  
 Email: [mroberts@safesupplies.com.au](mailto:mroberts@safesupplies.com.au)